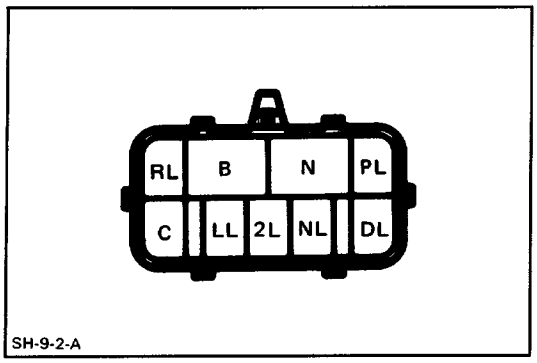

Park Neutral Position Switch

INSPECTION OF PARK/NEUTRAL POSIITON SWITCH

Inspect that there is continuity between each terminals.

Shift Position \ Terminal	B	N	PL	RL	NL	DL	2L	LL	C
P	○	○	○						○
R				○					○
N	○	○			○				○
D						○			○
2							○		○
L								○	○